


M / scale 1:1


Bestückungsplan / contact layout

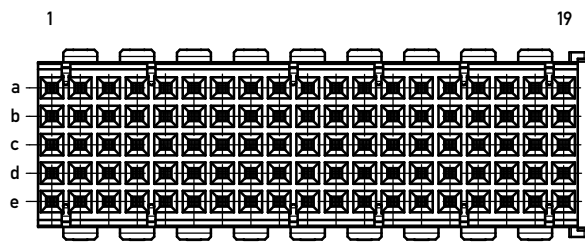

■ = bestückt / assemble

Lochbild für Leiterplatte  
(Bestückungsseite)

board hole pattern  
(component mounting side)

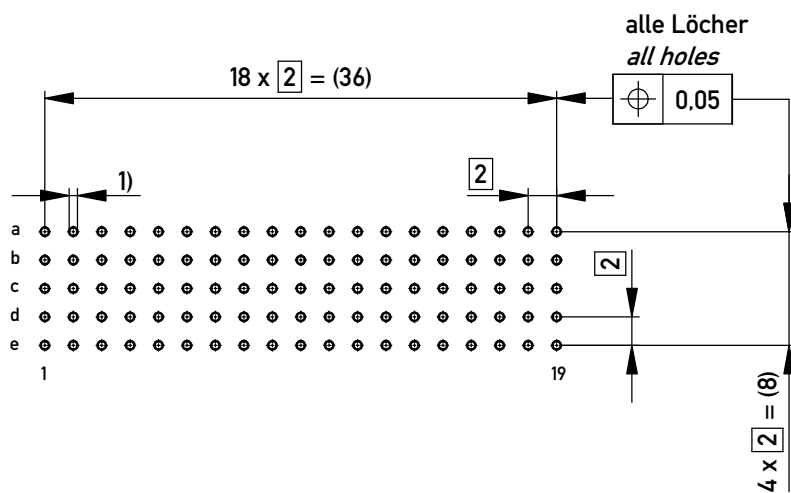

- 1)  $\varnothing 0,6 \pm 0,05$  Durchmesser des metallisierten Loches  
 $\varnothing 0,6 \pm 0,05$  Diameter of finished plated-through hole

Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 Nr.1  
 Metal plating of plating-through hole according to 164062 No.1

Fehlende Maße und Angaben nach IEC 61076-4-101  
 Missing information and dimensions per 61076-4-101

RoHS:6/6

**Plating:**  
 Signal Contacts:  
 Termin. area: 2-3 $\mu$ m Ni, 0.5-2 $\mu$ m Sn  
 Mating area: 2-3 $\mu$ m Ni, 0.65 $\mu$ m PdNi with Au-Flash

Information: Anforderungsstufe 2 / class 2 All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances All Dimensions in mm	Scale 2:1
		Designation <b>ERmet-FS Federleiste B19</b> <i>ERmet-Female Straight Type B19</i>
e Index	01.02.2018 Date	www.ERNI.com <b>114111</b> Class ERMB19
		I A3

Copyright by ERNI Production GmbH & Co. KG  
 Proprietary notice pursuant to ISO 16016 to be observed.